

APPLICATION:


PRODUCT NAME:
**POT FILLER HOSE STYLE
 8" C/C ADJUSTABLE WALL MOUNT**

JOB NAME:

_____ SPECIAL CONFIGURATION
 (CHECK BASE MODEL AND OPTIONS)
 MODEL:
 2250


QUANTITY:

ITEM NO.:

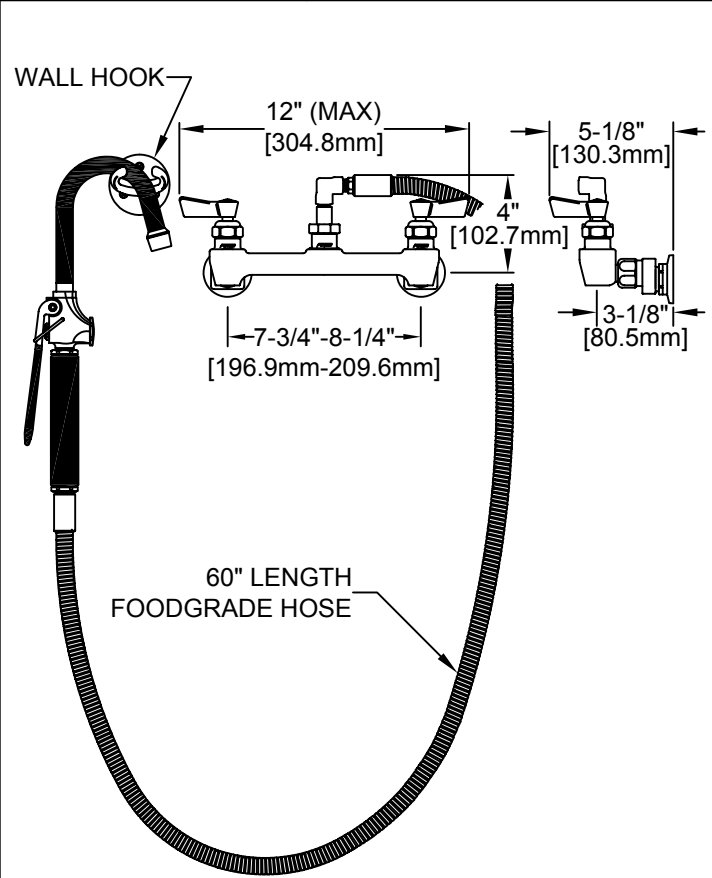


- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 - ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH
 - BACKFLOW PREVENTER
 - PIPE HOOK
 - NIPPLES
 - ELBOWS
 - VANDAL RESISTANT KIT
 - HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - OTHER _____

ROUGH-IN:

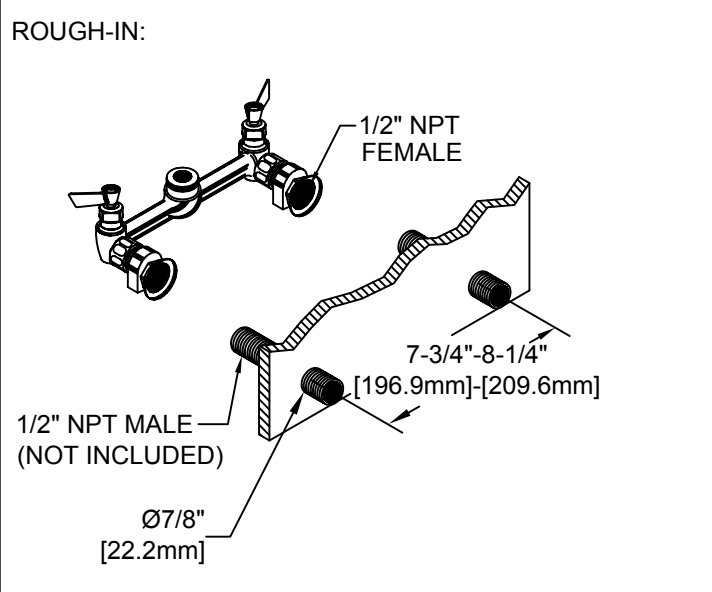

- FEATURES:
- CONTROL VALVE**
- * 8" C/C ADJUSTABLE WALL MOUNT
 - * ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4"
 - * INTERNAL SPRING LOADED CHECK VALVES
 - * SWIVELING SEAT DISKS
 - * HOT SIDE STEM - RIGHT HAND
 - * COLD SIDE STEM - LEFT HAND
 - * STAINLESS STEEL SEATS
 - * STAINLESS STEEL SEAT SCREWS
 - * STAINLESS STEEL HANDLE SCREWS
- HOSE**
- * 60" LENGTH
 - * STAINLESS STEEL END FITTINGS
 - * STAINLESS STEEL EXTERNAL JACKET
 - * BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE
- POT FILLER VALVE**
- * NON SCRATCHING/ MARRING TUBE
 - * 5.00 GPM AT 80 PSI
 - * AERATED STREAM
- SWIVEL ELBOW**
- * 360° TURNING RADIUS
- SYSTEM LIMITS**
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE 200 PSI MAX. STATIC
- SHIPPING WEIGHT**
- * 9.0 LBS

 ANSI/A112.18.1M, ANSI/NSF 61.9

FISHER

FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com